

e/one
sentry

Custom Alarm Panels
for E/One Low Pressure
Sewer Systems



The World's Best Low Pressure
Sewer System Sets a New Standard
in Reliability and Convenience

e one
SEWER SYSTEMS

e/one sentry



The Sentry line of alarm panels is custom designed for use with E/One grinder pump systems. **The E/One Sentry™ alarm panels provide the latest technology and the greatest flexibility** in customizing features to satisfy individual needs. The new alarm panels **can be configured** to provide functions ranging from basic alarm indication to advanced warning of pending service requirements. In between, **there are numerous features available** including an event counter; run-time meter; service disconnect capability; and remote alarm indication.

The basic E/One Sentry panel provides features essential to any installation:

- A. Circuit breakers for pump power and alarm circuits
- B. Audible high level alarm indication
- C. Visual high level alarm indication
- D. High level alarm silence switch
- E. Manual Run switch
- F. Redundant "Start" function with high level alarm
- G. Run indicator to show when pump is operating

Like the E/One grinder pump station, all panels are UL and CSA listed and meet all applicable NEC and NFPA codes and standards. Furthermore, all E/One Sentry alarm panels are housed in **NEMA 4X lockable enclosures**, suitable for mounting on a wall or a post.

THE E/ONE REMOTE SENTRY DISPLAY MODULE provides visual and audible indication when the water level inside the grinder pump tank reaches a predetermined "high" level during normal operation, or in the event of a power outage (with hard-wired version of *Extreme* core and optional contacts in panel). It is ideally suited for installations where the outdoor alarm panel location is obstructed from view, or where an Indoor Unit (IDU) installation is isolated in a utility room.

The Remote Sentry includes:

- A low profile attractive case (5.4"W x 3.69"H x 1.25"D)
- Lithium battery
- Audible alarm (70dB)
- Push-to-silence audible alarm switch
- Push-to-test visual and audible alarm



Now Available in Two Upgrades



E/ONE SENTRY PROTECT

The E/One Sentry Protect panel provides important protection from external conditions that could otherwise prove damaging to the E/One grinder pump station.

Adding the Protect option to the E/One Sentry panel provides a Trouble indication and shuts down the pump/core temporarily in the event of an unacceptable operating condition.


The pump/core will automatically return to Normal operation when the condition is resolved. The Protect feature provides monitoring of:

- Brownout conditions with the electrical power supply
- System over-pressure condition such as with a closed valve
- Run-dry operation of the pump/core

E/ONE SENTRY PROTECT PLUS

Taking it to the next level, the E/One Sentry Protect Plus includes the benefits of the Protect option as well as a diagnostics package that provides advance warning of pending service needs by monitoring major operating conditions and providing a Trouble indication when these conditions fall outside of normal ranges. Depending upon the severity of the abnormal condition, the grinder pump station may continue to operate. The Protect Plus feature provides monitoring of:

- AC input voltage – if input voltage falls below 88% or above 112% of normal line voltage a Trouble indication is provided
- Amperage – if amperage exceeds preset limits a Trouble indication is provided
- Pump run-time – if the pump operates for extended periods (adjustable) a Trouble indication is provided

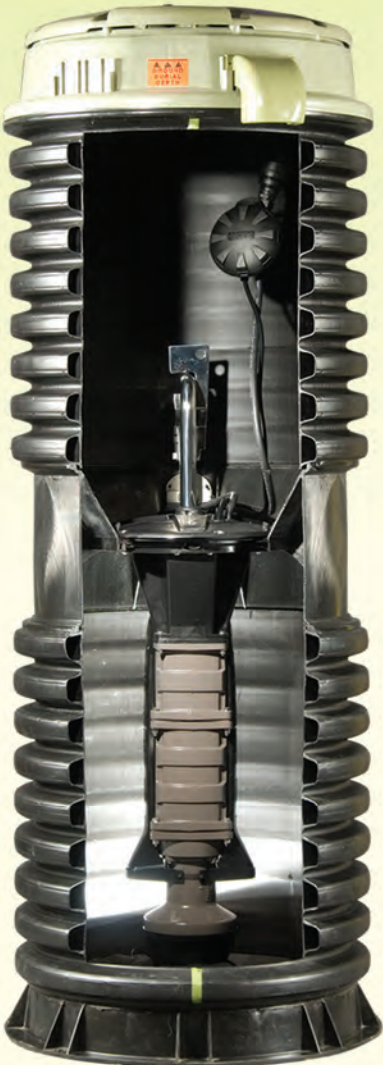

The following features are included or available with the E/One Sentry Protect Plus to maximize reliability and convenience:

- 1 Visual Alarm Indicator
- 2 Audible Alarm
- 3 Alarm Silence Switch
- 4 GFCI Receptacle
(2) 120-volt, 15 Amp GFCI receptacles (available option)
- 5 Main Service Disconnect Breaker (available option)
- 6 Easy-Access Terminal Strips Interface
- 7 Display Panel Operating Indicators
 - Ready (AC Power) Indicator
 - Pump Running Indicator
 - Trouble Indicator
 - High Level Alarm Indicator
- 8 LCD Display
 - Manual Run Switch/Enter Switch
 - Scroll Switch
 - Trouble indications include:
 - Brown-out Condition
 - Run-dry Condition
 - System Over-pressure Condition
 - Voltage Problem
 - Amperage Problem
 - Run-time Limit Exceeded

- 9 Diagnostic Mode Switch (For system setup/service)
 - Diagnostic Mode Indicators
 - Pump Performance provides access to performance statistics including:
 - Real-time Voltage
 - Real-time Amperage
 - Real-time Wattage
 - Minimum Voltage
 - Maximum Voltage
 - Minimum Amperage
 - Maximum Amperage
 - Minimum Run-time
 - Maximum Run-time
 - Average Run-time
 - Last Run-time
 - Event Counter
 - Hour Meter
 - Initialize System
 - Run Limit
 - Alarm Delay
 - Power Delay

- 10 Generator Receptacle (available option)
- 11 Auto Transfer Switch (AC Mains to Portable Generator) (available option)



e one
SEWER SYSTEMS

Environment One Corporation
2773 Balltown Road
Niskayuna, NY USA 12309-1090
Voice (01) 518.346.6161
Fax 518.346.6188
www.eone.com

A Precision Castparts Company
LM000323 Rev. B